



**MAGYAR JÁRMŰTECHNIKAI ZRT.**



**MJT CityMover 15**

**MJT InterMover 15**

**City / intercity 3-axle double deck bus**

**MJT CityMover 15 (JTDD51)  
MJT InterMover 15 (JTDD52)  
City / intercity 3-axle double deck bus**

**Engine:**

MAN D 2066 LOH 26 Common-rail direct injection, turbo charged diesel engine with intercooler, 6 cylinders in line, EEV.

Displacement: ..... 10518 cm<sup>3</sup>  
Maximum output: ..... 235 kW (320 HP)  
Maximum torque: ..... 1600 Nm

**Transmission:**

ZF Ecolife 6 AP 1700 B automatic gearbox with integrated hydraulic retarder.

**Suspension:**

ZF RL 75 EC independent suspension at front and rear. ZF AV132/87 portal driven axle at the middle with air springs and hydraulic shock absorbers. Electronic levelling control with level raising, lowering and full-side kneeling.

Wheel rims: front: ..... 9,00x22,5  
rear: ..... 8,25x22,5  
Tyres: front: ..... 315/60 R22,5  
rear: ..... 275/70 R22,5

**Steering:**

ZF Servocom 8098 hydraulic power steering, ZF RAS system on the rear axle.

**Braking system:**

Dual circuit, full dry air brake system, ABS, ASR, haltbrake.  
Disk brakes with wear indicator on all wheels.

**Basic equipment:**


Low floor throughout the lower deck  
Two staircases  
Multiplex electrical system  
Stainless steel fuel tank with a capacity of 330 litres  
Colour LCD information display on the instrument panel  
Fluorescent interior lighting  
Convecter heating along side walls  
Air ducts above side windows with individual vent panels for all the seated passengers  
Driver's seat with headrest and pneumatic lumbar support, fitted with 3 point seat belt  
Adjustable steering wheel for both angle and height  
Monitoring system for the rear door and for the upper deck  
Tinted side windows

**Options:**

Air conditioning for both decks  
Stainless steel body structure  
Sightseeing version without roof, or with sliding canvas roof  
Electrically operated rear view mirrors  
Electrically operated roller blind for the windscreen  
Manually folded ramp for wheelchair  
Passenger information system with LED displays  
Auxiliary independent heater  
Audio system  
8-channel multilingual headphone system  
Heated driver's seat

**Dimensions and weights:**

Length: ..... 13700 mm  
Width: ..... 2500 mm  
Height: ..... 4000 mm  
Wheelbase: ..... 5900+1700 mm  
Overhang front: ..... 2700 mm  
Overhang rear: ..... 3400 mm  
Empty weight: ..... 15000 - 15500 kg  
Gross vehicle weight: ..... 24000 - 26000 kg  
Seated passenger capacity: ..... 96 - 100  
Total passenger capacity: ..... 120 - 160

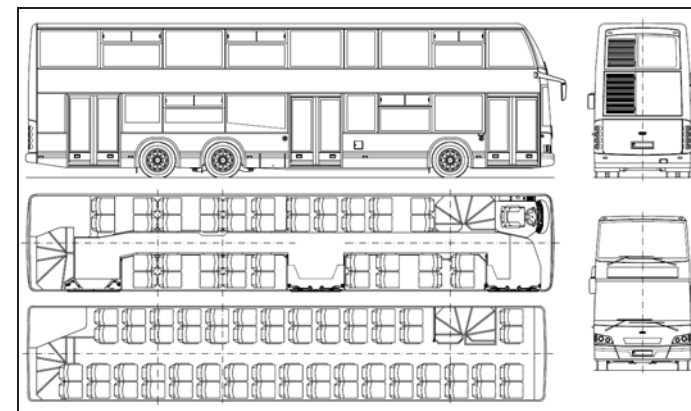

*MJT reserves the right to make changes without prior notice!*



**MAGYAR JÁRMŰTECHNIKAI ZRT. - HUNGARY**

☎: 4002 Debrecen, Balmazújvárosi út 14. ☎: +36 52 448-388 ☎: +36 52 448-647 ✉: info@mjt-zrt.eu www.mjt-zrt.eu